

Jasco Z-Wave In-wall Tamper Resistant Smart Outlet JASCO®



Specifications

Power: 120VAC, 60Hz **Signal Frequency:** 908.4/916

Maximum Load for the Z-wave Controlled Outlet:

960W Incandescent, 1/2 HP Motor 1800W Resistive

Range: Up to 150 feet from controller or closest Z-Wave device

Operating Temperature: 32-104° F (0-40° C)

Warranty: 5-year limited product warranty

For indoor use only.


Design Features

- Turn the connected device On/Off manually or via Z-Wave remote control
- Remotely monitor with any mobile device*
- One Z-Wave remote controlled AC outlet (bottom outlet)
- Remote ON/OFF control via the Z-Wave controller/network
- Manual ON/OFF control with the front button
- One Always-ON pass through AC outlet (top outlet)
- Blue LED indicates ON/OFF status (supports advanced configuration for LED status)
- Z-Wave Plus certified
- White color


Z-Wave Plus Features

- Works with Z-Wave Classic and Z-Wave Plus Products
- 50% more wireless range
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home


* Requires Z-Wave hub or controller, functions may vary depending on brand.

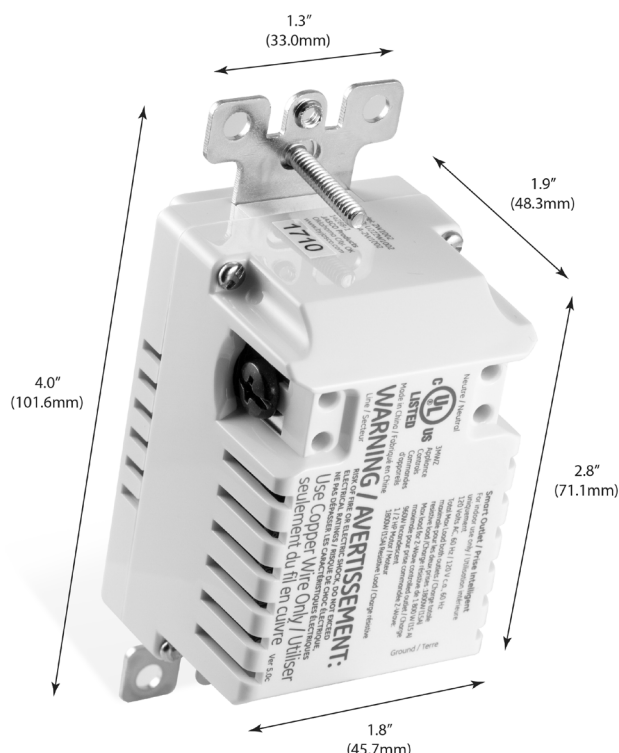

Single Location Wiring

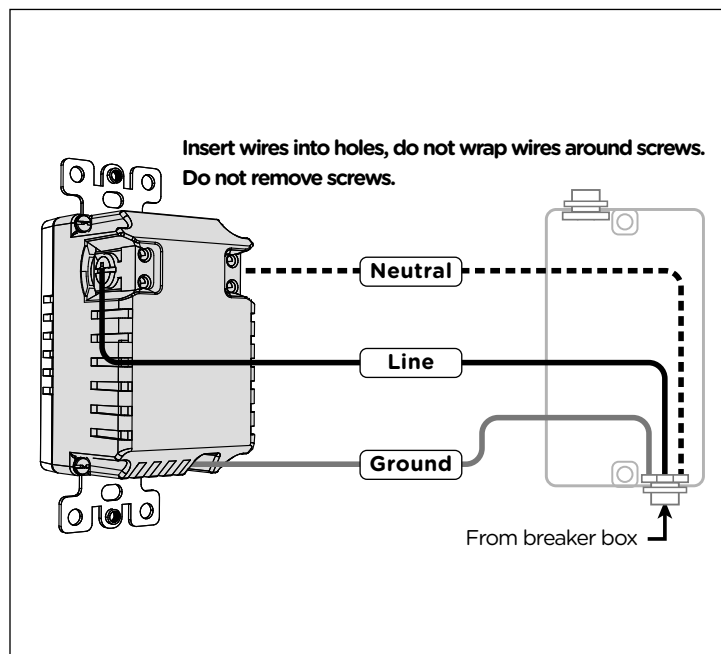


Space-Saving Screw Terminals

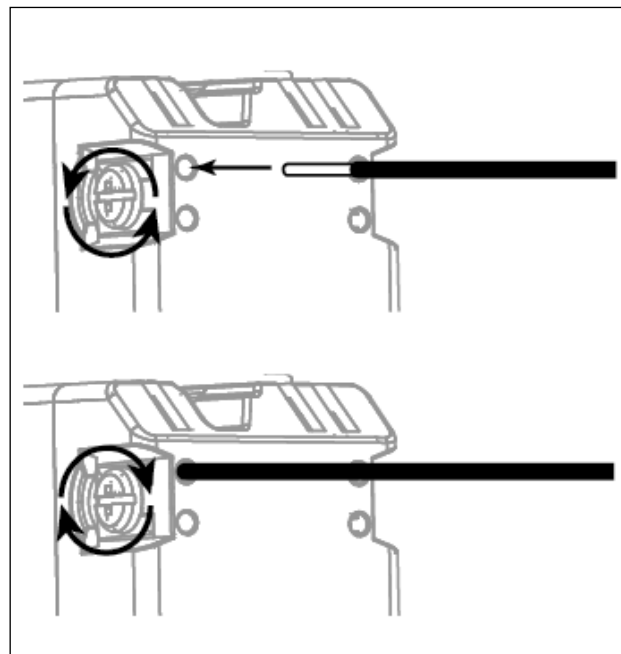

Two Outlets


Contains one grounded Z-Wave AC outlet and one standard grounded AC outlet.



Tamper Resistant

Prevents objects being forcibly inserted into a single slot.

- Improves child safety
- Prevents injuries associated with electrical receptacles
- Meets National Electric Code (NEC) requirements
- UL approved

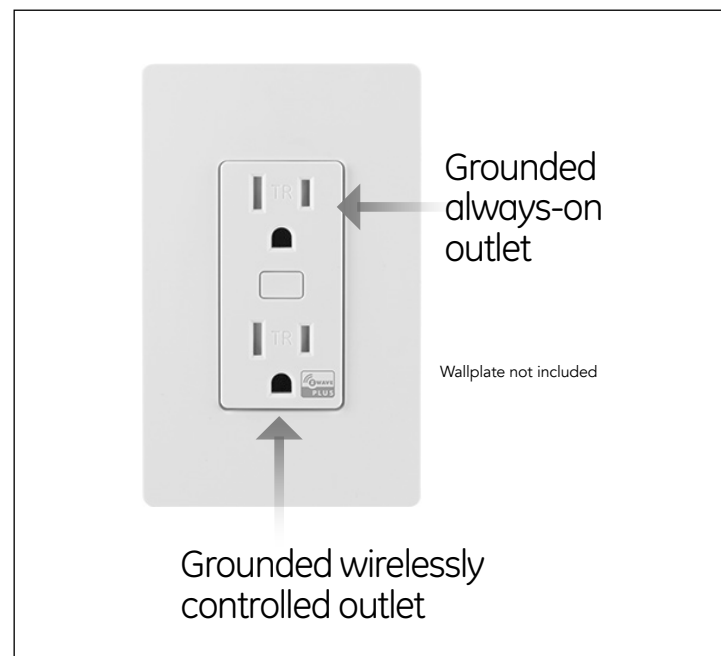

Installation Recommendations:

- Devices require a 1-gang U.S. wall box. 3½ in deep recommended, 2¼ in deep minimum.
- Indoor use only
- Visit <http://www.ezwave.com/hubs/> for hub compatibility
- Wallplates sold separately
- Trilingual Instruction manual – (English, French, Spanish)
- Insert wires into holes, do not wrap around screws. Do not remove screws.

Device Configuration

Adding your device to a Z-Wave network

Once the hub is ready to add your smart outlet, press and release the button on the smart outlet to add it in the network.

To remove and reset the device

Once the controller is ready to remove your device, press and release the button on the smart outlet to remove it from the network.

To return to factory defaults

Press the button 3 times, then press and hold the button for at least 3 seconds. The LED will blink 5 times to confirm.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice.

Distributed by Jasco Products Company LLC
10 E. Memorial Rd., Oklahoma City, OK

Questions? Contact our U.S.-based Consumer Care at
1-800-654-8483 between 7AM-8PM, M-F, Central Time.

©Jasco 2021

Related Products - Jasco Z-Wave In-Wall Smart Controls



46562
In-Wall
Smart Switch



46564
In-Wall
Smart Dimmer



34770
In-Wall Smart
Motion Switch



26932
In-Wall Smart
Motion Dimmer