


JASCO
PRO™



Smart Surface-Mount
Light

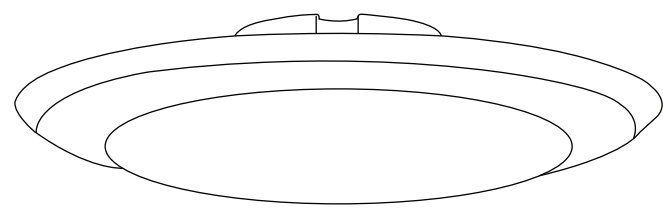


81901
WFK7118M

JASCO
PRO™



Luz inteligente de
montaje en superficie

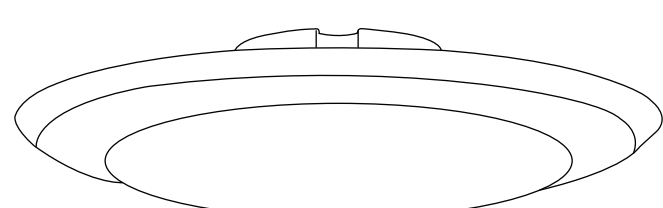

81901
WFK7118M

SPECIFICATIONS — IMPORTANT!

WFK7118M
FCC ID: 2ANDL-CB2L
Power: 120VAC, 60Hz, 12W
Signal (frequency): 2.4GHz

Indoor use only

INSTALLATION


- Turn off power at the circuit breaker or fuse box.
- Partially install two provided screws into the junction box.
- Using wire nuts, connect the wires in the junction box to the light wires:
 - Secure the green or bare copper ground wire to the green wire
 - Secure the white wire to the white wire.
 - Secure the black wire to the black wire
- Align the light with the screws and push up until flush with the ceiling.
- Tighten the junction box screws to secure the light.
- Align the diffuser to the housing and twist to lock it in place.
- Turn on power at the circuit breaker or fuse box.
- Follow the steps below to add the smart light to your network.

PAIRING TO MATTER-CERTIFIED CONTROLLER

- Open the JascoPro or other Matter-certified app.
- Turn on power to the light.
- Access the add devices screen in the app.
- Scan the QR code on the smart light or packaging.

RESTORING FACTORY DEFAULTS

- Turn off power to the light, pause one second, turn on power.
- Repeat four times — five total.
- The smart light flashes twice when reset.




Thank you for your purchase!



Instructions
made easy
Read instructions
or watch easy-to-
follow video.

Scan code or visit byjasco.com/81901i.



For additional JascoPro products, visit jascopro.com.



Register your
product
Receive exclusive
deals and register
your product.

Scan code or visit byjasco.com/deals.




Having Problems?
Let us know how we can help.
Call **1-833-981-0170**, M-F.

FEATURES

Brightness: 950 lumens at 2700K and 1100 lumens at 6500K
Color temperature range: 2700K-6500K
Light color: RGBWW
CRI: 92
Direct wire
Remote ON/OFF, brightness and color temperature control via
Matter-enabled controller

Average Beam Angle (50%) : 114.6°

UNIT: cd
C90/270,114.5




¡Gracias por su compra!



Instrucciones
fáciles
Lea las instrucciones
o mire el video con el
paso a paso.

Escanee el código o visite
byjasco.com/81901i.



Para ver más productos JascoPro Series,
visite nuestro sitio web: jascopro.com.



Registre su
producto
Reciba ofertas
exclusivas y registre
su producto.

Escanee el código o visite
byjasco.com/deals.




¿Tiene algún problema?
Díganos cómo podemos ayudar.
Llame al **1-833-981-0170**, de lunes a
viernes.

CARACTERÍSTICAS

Brillo: 950 lúmenes a 2700K y 1100 lúmenes a 6500K
Rango de temperatura de color: 2700K-6500K
Color de luz: RGBWW
IRC: 92
Cable directo
Control remoto de encendido/apagado, brillo y temperatura de
color a través del controlador habilitado para Matter

Ángulo de haz promedio (50%) : 114.6°

UNIDAD: cd
C90/270,114.5



ESPECIFICACIONES ¡IMPORTANTE!

WFK7118M
ID DE LA FCC: 2ANDL-CB2L
Potencia: 120VCA, 60Hz, 12W
Señal (frecuencia): 2.4GHz

Uso exclusivo en interior

INSTALACIÓN

- Apague la corriente en el disyuntor o en la caja de fusibles.
- Instale parcialmente dos tornillos provistos en la caja de conexiones.
- Usando tuercas para cables, conecte los cables de la caja de conexiones a los cables de la luz:
 - Asegure el cable a tierra de cobre verde o pelado al cable verde
 - Asegure el cable blanco al cable blanco.
 - Asegure el cable negro al cable negro
- Alinee la luz con los tornillos y empuje hacia arriba hasta que esté a ras con el techo.
- Apriete los tornillos de la caja de conexiones para asegurar la luz.
- Alinee el difusor con la carcasa y gírelo para fijarlo en su lugar.
- Conecte la corriente en el disyuntor o en la caja de fusibles.
- Siga los pasos a continuación para agregar la luz inteligente a su red.

EMPAREJAMIENTO CON UN CONTROLADOR CERTIFICADO POR MATTER

- Abra JascoPro u otra aplicación certificada por Matter.
- Encienda la alimentación de la luz.
- Acceda a la pantalla para agregar dispositivos en la aplicación.
- Escanee el código QR en la luz descendente inteligente o en el paquete.

RESTAURAR LOS VALORES DE FÁBRICA

- Apague la luz, haga una pausa de un segundo y enciéndala.
- Repita cuatro veces cinco en total
- El luz inteligente destellará dos veces cuando se reinicie.



INSTALL THE APP

Remotely operate your smart light with the easy-to-use JascoPro app or any Matter-certified controller. Follow the available instructions and resources to set up your smart device.

1

Download the app



Scan the QR code or search JascoPro on
the Apple App Store or on Google Play



3

Setup and installation




Follow the steps in the
pairing section to
connect your device to
the app



Add devices, control
the smart light from
anywhere and create
schedules

2

Setup and installation



Create an account
in the JascoPro app



Install the smart light
using the provided
instructions

4

Voice control

Voice control works with Amazon
Alexa or Google Assistant



Select "Support" in the JascoPro app or follow the
steps in the Amazon Alexa or Google Home app to
connect your JascoPro account

INSTALE LA APP

Opere de forma remota su luz inteligente con la aplicación JascoPro fácil de usar o cualquier controlador certificado por Matter. Siga las instrucciones y los recursos disponibles para configurar su dispositivo inteligente.

1

Descargue la app



Escanee el código QR de arriba o busque
JascoPro en el Apple App Store o en
Google Play



3

Instalación y configuración



Siga los pasos en la
sección de
emparejamiento para
conectar su dispositivo
a la aplicación




Agregar dispositivos,
cree horarios y
controle el luz
inteligente desde
cualquier lugar

2

Instalación y configuración



Cree una cuenta en
la app JascoPro



Instale la luz inteligente
siguiendo las
instrucciones
proporcionadas

4

Control por voz

El control por voz funciona con
Amazon Alexa o Google Assistant



Seleccione "Soporte" en la aplicación JascoPro o
siga los pasos en la aplicación Amazon Alexa o
Google Home para conectar su cuenta JascoPro

WARNING/ADVERTENCIA/AVERTISSEMENT

- NOT FOR EMERGENCY LIGHTING
- RISK OF ELECTRIC SHOCK
- RISK OF FIRE
- RISK OF BURNS
- USE IN DRY LOCATIONS ONLY
- ONLY USE THE CONTROL PROVIDED WITH OR SPECIFIED BY THESE INSTRUCTIONS TO CONTROL THIS LAMP. THIS LAMP WILL NOT OPERATE PROPERLY WHEN CONNECTED TO A STANDARD (INCANDESCENT) DIMMER OR DIMMING CONTROL.

- NO PARA ILUMINACIÓN DE EMERGENCIA
- RIESGO DE DESCARGA ELÉCTRICA
- RIESGO DE FUEGO
- RIESGO DE QUEMADURAS
- UTILIZAR SOLO EN LUGARES SECOS
- UTILICE ÚNICAMENTE EL CONTROL PROPORCIONADO O ESPECIFICADO EN ESTAS INSTRUCCIONES PARA CONTROLAR ESTA LÁMPARA. ESTA LUZ NO FUNCIONARÁ CORRECTAMENTE CUANDO ESTÉ CONECTADA A UN ATENUADOR O CONTROL DE ATENUACIÓN (INCANDESCENT) ESTÁNDAR

All brand names shown are trademarks of their respective owners.
App Store is a service mark of Apple Inc. Google, Google Play and Google Home are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

MADE IN CHINA
Distributed by Jasco Products Company LLC, 10 E. Memorial Rd., Oklahoma City, OK 73114.
This Jasco product has a 10-year limited warranty. Visit www.byjasco.com for warranty details.
Questions? Contact our U.S.-based Consumer Care at 1-833-981-0170, M-F.
©JASCO 2024 | WFK7118M | 81901 | 09/10/24 v6

PATENTS/PATENTS PENDING WWW.BYJASCO.COM/PATENTS

HECHO EN CHINA
Distribuido por Jasco Products Company LLC, 10 E. Memorial Rd., Oklahoma City, OK 73114.
Este producto de Jasco tiene una garantía limitada de 10 años. Visite www.byjasco.com para conocer los detalles de la garantía.
¿Tiene preguntas? Comuníquese con nuestro servicio de atención al consumidor de EE. UU. al 1-833-981-0170, de lunes a viernes.
©JASCO 2024 | WFK7118M | 81901 | 09/10/24 v6

PATENTES/PATENTES PENDIENTES WWW.BYJASCO.COM/PATENTS

Todos los nombres de marcas son marcas comerciales de sus respectivos propietarios.
App Store es una marca de servicio de Apple Inc. Google, Google Play y Google Home son marcas comerciales de Google LLC. Amazon, Alexa y todos los logotipos relacionados son marcas registradas de Amazon.com, Inc. o sus filiales.
HECHO EN CHINA
Distribuido por Jasco Products Company LLC, 10 E. Memorial Rd., Oklahoma City, OK 73114.
Este producto de Jasco tiene una garantía limitada de 10 años. Visite www.byjasco.com para conocer los detalles de la garantía.
¿Tiene preguntas? Comuníquese con nuestro servicio de atención al consumidor de EE. UU. al 1-833-981-0170, de lunes a viernes.
©JASCO 2024 | WFK7118M | 81901 | 09/10/24 v6

FCC/IC - EN

Suppliers Declaration of Conformity | Model #: 81901 | Jasco Products Co., 10 E. Memorial Rd., Oklahoma City, OK 73114, www.byjasco.com

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

IMPORTANT NOTE: To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.

Declaración de conformidad del proveedor | Modelo #: 81901 | Jasco Products Co., 10 E. Memorial Rd., Oklahoma City, OK 73114, www.byjasco.com

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTA DE LA FCC: El fabricante no se hace responsable de ninguna interferencia de radio o TV ocasionada por modificaciones no autorizadas efectuadas a este equipo. Dichas modificaciones podrían anular la autoridad del usuario para utilizar el equipo.

NOTA: Este equipo ha sido probado y cumple con los límites para aparatos digitales de Clase B, de conformidad con el apartado 15 de las normas de la FCC. Estos límites están diseñados para proveer protección razonable contra interferencias perjudiciales en una instalación residencial. Este equipo genera, usa y puede irradiar energía de radiofrecuencias y si no se instala y usa según las instrucciones, puede provocar interferencia perjudicial a las radiocomunicaciones. No obstante, no hay garantías de que no ocurrirá interferencia en una instalación en particular. Si este equipo provoca interferencia perjudicial a la recepción de radio o televisión, lo que puede determinarse encendiendo y apagando el equipo, se recomienda que el usuario intente corregir la interferencia por medio de la implementación de una o más de las siguientes medidas:

- Reorientar o reubicar la antena receptora.
- Incrementar la separación entre el equipo y el receptor.
- Conectar el equipo a un tomacorriente de un circuito diferente del circuito al que está conectado el receptor.
- Consultar al distribuidor o a un técnico con experiencia en radio/televisión para solicitar asistencia.

NOTA IMPORTANTE: Para cumplir con los requisitos de exposición a RF de la FCC, no se permiten cambios en la antena ni en el dispositivo. Cualquier cambio en la antena o el dispositivo podría provocar que el dispositivo exceda los requisitos de exposición a RF y anular la autoridad del usuario para operar el dispositivo.