


# JascoPro Series Wi-Fi In-Wall Smart Outlet

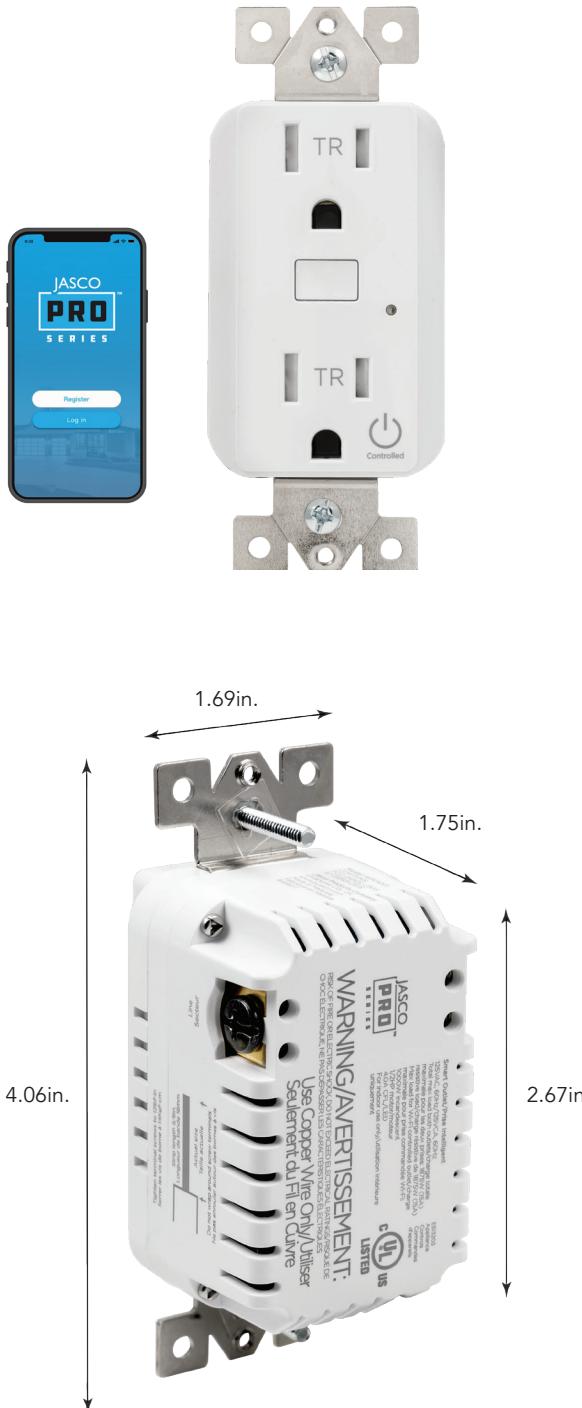

## Specifications

**Power:** 125VAC, 60Hz

**Total Max Load for Both Outlets:** 1875W (15A) resistive load

**Max Load for Wi-Fi Controlled Outlet:** 1000W incandescent, 1/2HP motor, 1875W (15A) resistive, 4.0A CFL/LED

**Range:** Up to 150ft. from router

**Operating Temperature:** 32-104° F (0-40° C)

**Warranty:** 10-year limited, nontransferable product warranty



**For indoor use only**

## Design Features

- One always-on pass-through outlet – top outlet
- One Wi-Fi controlled outlet – bottom outlet
- Requires 2.4GHz Wi-Fi – compatible with single-, dual- and tri-band routers
- Free JascoPro Series app – no hub required
- Effortless Wi-Fi setup and control
- Mobile or voice control – works with Amazon Alexa and Google Assistant
- Turn ON/OFF the connected device manually or with the JascoPro Series app
- Manual ON/OFF control with the front button
- Can be included in multiple groups and scenes
- Control and schedule lights, fans and other plug-in devices
- Screw terminal installation – requires wiring connections for line (hot), neutral and ground
- Tamper-resistant outlets
- Blue LED indicates ON/OFF status – supports advanced configuration for LED status
- Over-the-air (OTA) updatable – firmware and app updates ensure the latest features are always available
- Interchangeable faceplate – white and light almond included
- Uses standard rocker wallplate – not included

## Installation Recommendations:

- Insert wire into port and tighten screw – do not wrap wire around screw
- Wallplates sold separately
- Trilingual Instruction manual – English, French, Spanish

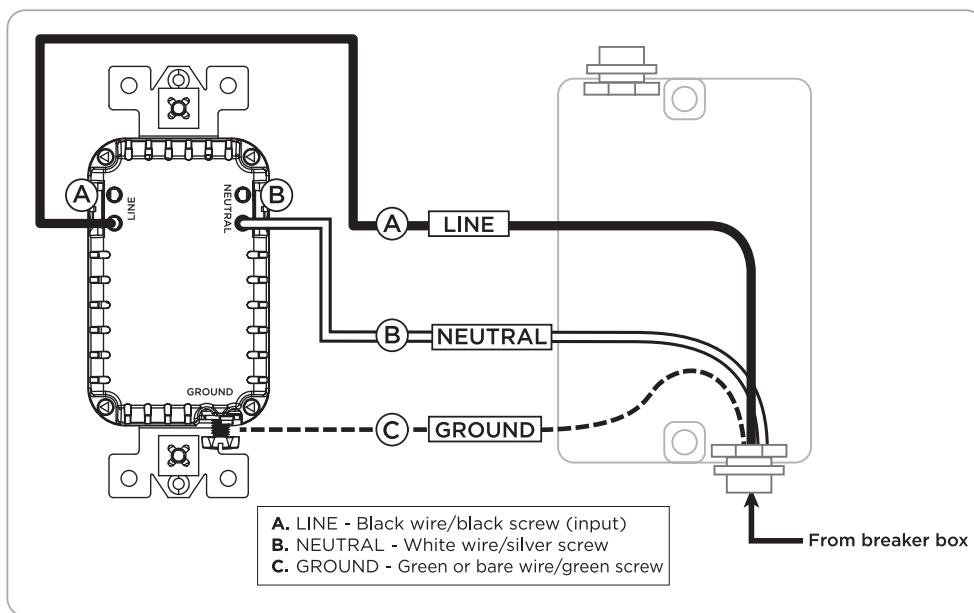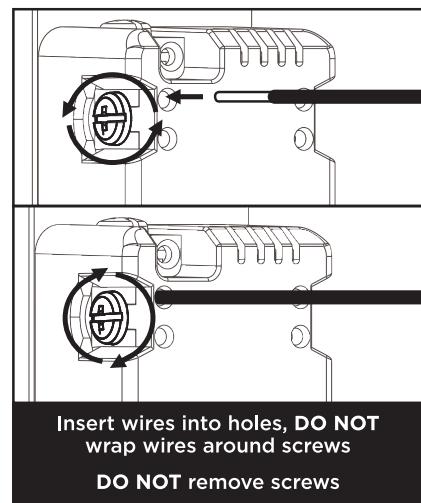**Wiring****Space-Saving Screw Terminals****Two Outlets**

Contains one standard grounded AC outlet and one Wi-Fi controlled AC outlet


**Tamper Resistant**

- Prevents objects being forcibly inserted into a single slot
- Improves child safety
- Prevents injuries associated with electrical receptacles
- Meets National Electric Code (NEC) requirements
- UL listed

## Install the App

Remotely operate your smart outlet with the easy-to-use JascoPro Series app. Follow the available instructions and resources to set up your smart device.

**NOTE:** If the LED is not flashing, press the programming button for five seconds to reset device and start the pairing process. If the LED is still not flashing, turn off power at the circuit breaker or fuse box, remove outlet and check wire connections.

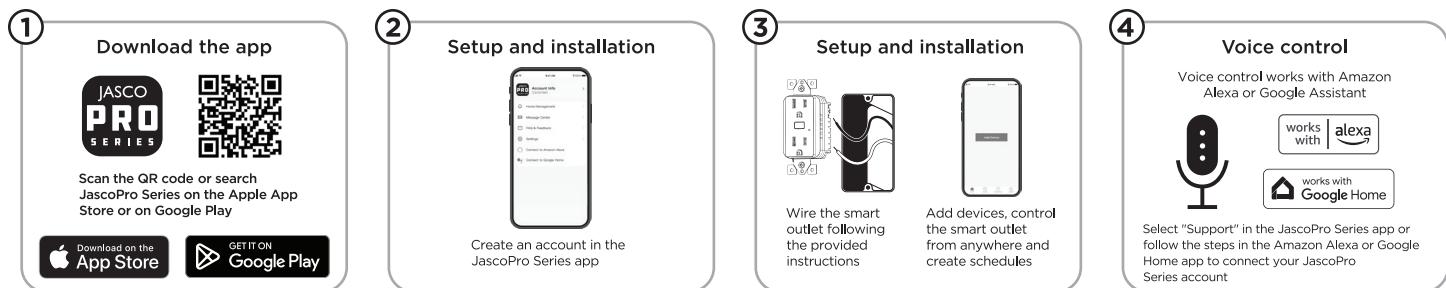

## Certifications & Compliances



Compliances, specifications and availability are subject to change without notice.

Distributed by Jasco Products Company LLC  
 10 E. Memorial Rd., Oklahoma City, OK 73114.

Questions? Contact our U.S.-based dedicated support at  
 1-833-981-0170, M-F, 7AM-8PM Central Time.

©Jasco 2024

## Related Products - JascoPro Series Wi-Fi In-Wall Smart Controls



**64556**  
 In-Wall Smart  
 Switch



**64557**  
 In-Wall Smart  
 Dimmer



**64559**  
 In-Wall Smart  
 Switch



Scan to see full line  
 of products or visit  
[jascopro.com](http://jascopro.com)