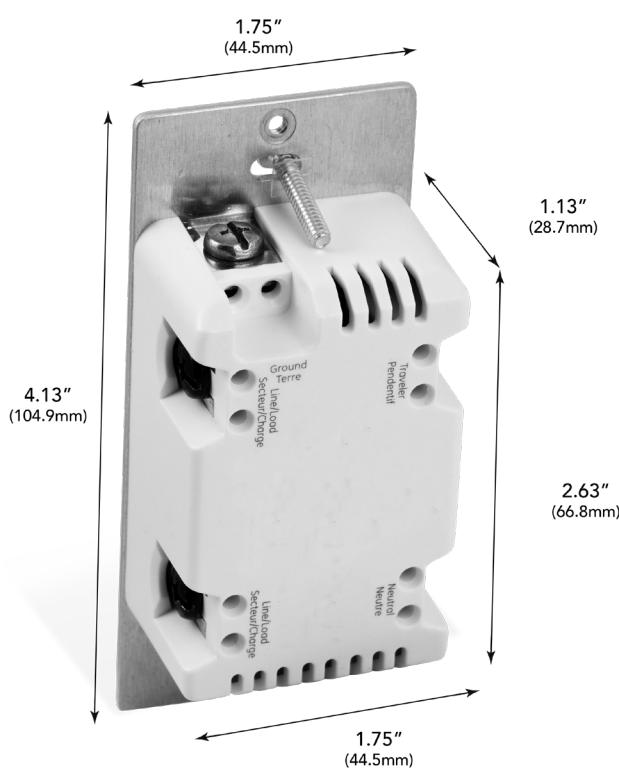


# JascoPro™ Series Wi-Fi In-wall Smart Switch



**QUICKFIT™**  
**SIMPLEWIRE™**



## Specifications

**Power:** 120VAC, 60Hz **Signal Frequency:** 2.4GHz

**Maximum Load:** 960W Incandescent, 1/2 HP Motor 1800W (15A Resistive)

**Range:** Up to 100 feet from router

**Operating Temperature:** 32-104° F (0-40° C)

**Warranty:** 5-year limited product warranty

**Requires neutral wire. Switch must be mounted indoors**


## Design Features

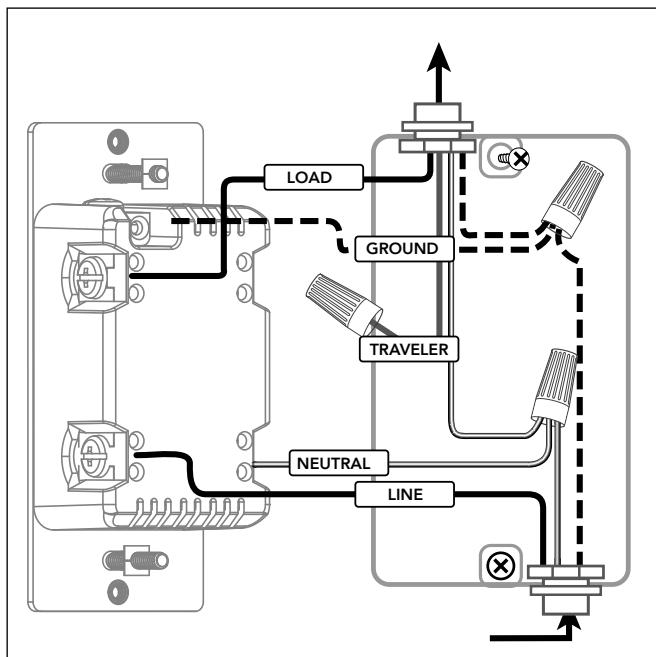
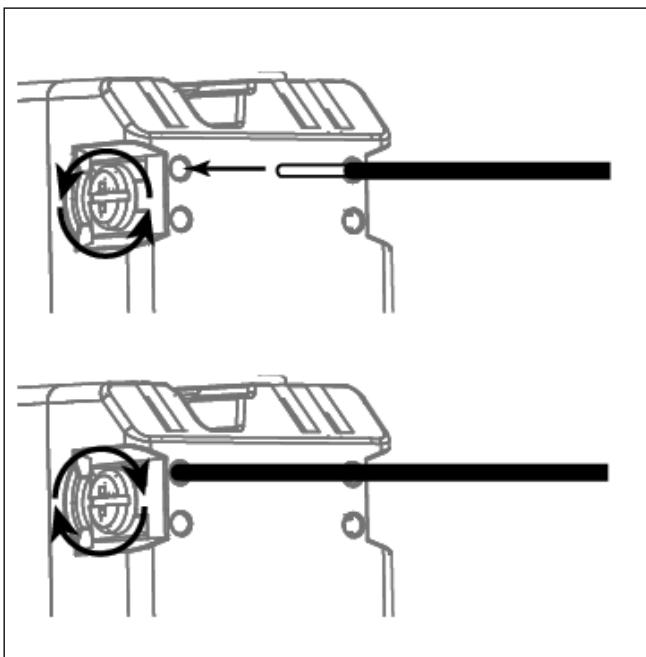
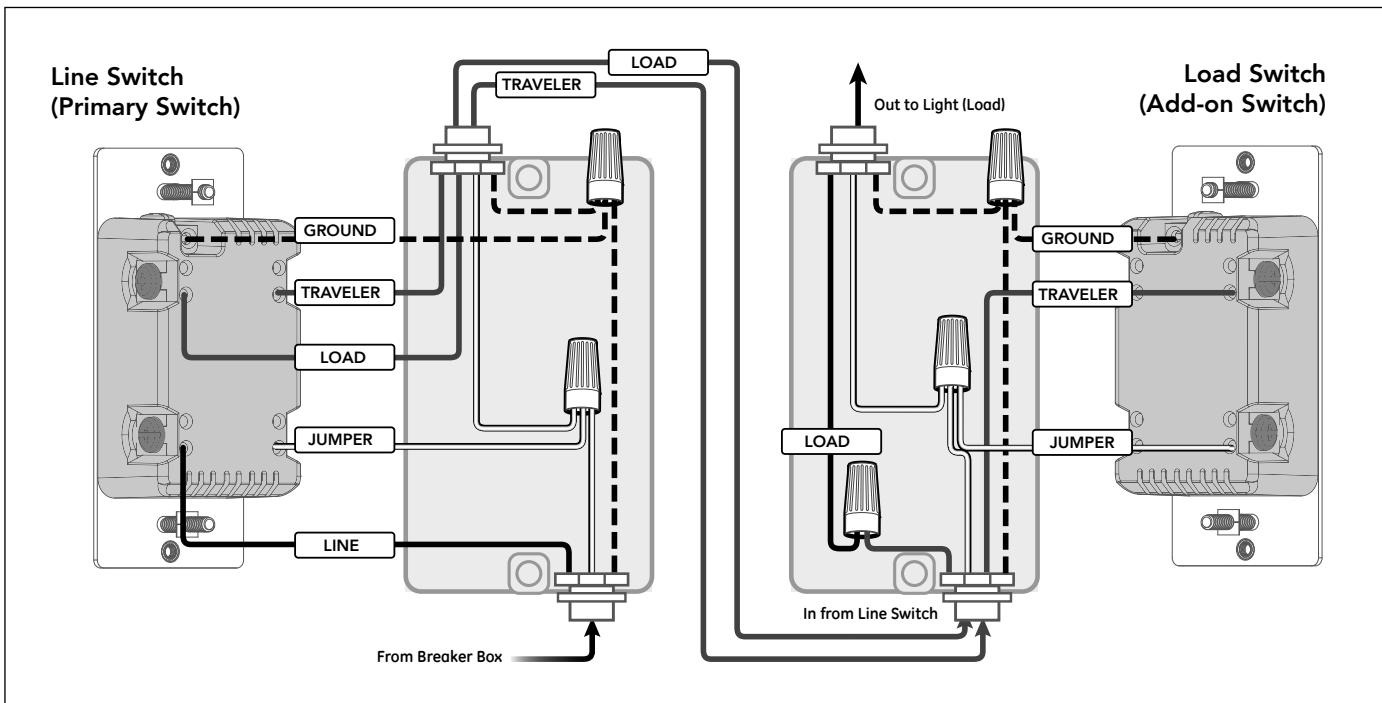
- QuickFit™ – Improved components reduce the housing depth by up to 20 percent compared to previous Wi-Fi models and eliminated the need for heat tabs
- SimpleWire™ – Auto line-load sensing terminals support fast installation by detecting line and load wires and configuring the switch accordingly. Dual ground ports, which are offset to avoid switch box mounting screws, support daisy-chaining in multi-switch setups
- Turn the connected device On/Off manually or with the JascoPro™ Series App
- May be used in single pole installation or with up to four Jasco model 46560 Add-on switches in 3 or 4-way connections, or can be connected with the existing 3-way switch.
- Works with all LED, CFL, halogen and incandescent bulbs
- Blue LED indicates automatic or manual paring mode status. Also indicates switch location in a dark room (with 4 adjustable settings)
- Can be included in multiple Groups, Scenes and automation
- Double-tap and triple-tap scene activation directly from device
- Screw Terminal installation; requires wiring connections for Line (Hot), Load, Neutral, and Ground. Traveler wire required for multi pole installation
- Uses a standard decora wall plate (wall plate not included)
- Interchangeable Paddle switch: White & light almond paddle included in package
- LED status can be inverted manually changed to invert, always OFF and always ON
- Inline traveler circuit protection

## Installation Recommendations:

- Insert wire into port and tighten screw. Do not wrap wire around screw
- Indoor use only
- Wallplates sold separately
- Trilingual Instruction manual – (English, French, Spanish)

**White/light almond paddles included**



**Single Location Wiring****Space-Saving Screw Terminals****Multi-Location Wiring****Certifications & Compliances**

Compliances, specifications and availability are subject to change without notice

**JASCO®** [www.byjasco.com](http://www.byjasco.com)

Distributed by Jasco Products Company LLC  
10 E. Memorial Rd., Oklahoma City, OK

Questions? Contact our U.S.-based Consumer Care at  
1-800-654-8483 between 7AM-8PM, M-F, Central Time.

©Jasco 2022